


Dehnzylinder Standardprogramm DS-15

Abmessungen und Vorspannkräfte

Maximaler Arbeitsdruck: 1.500bar

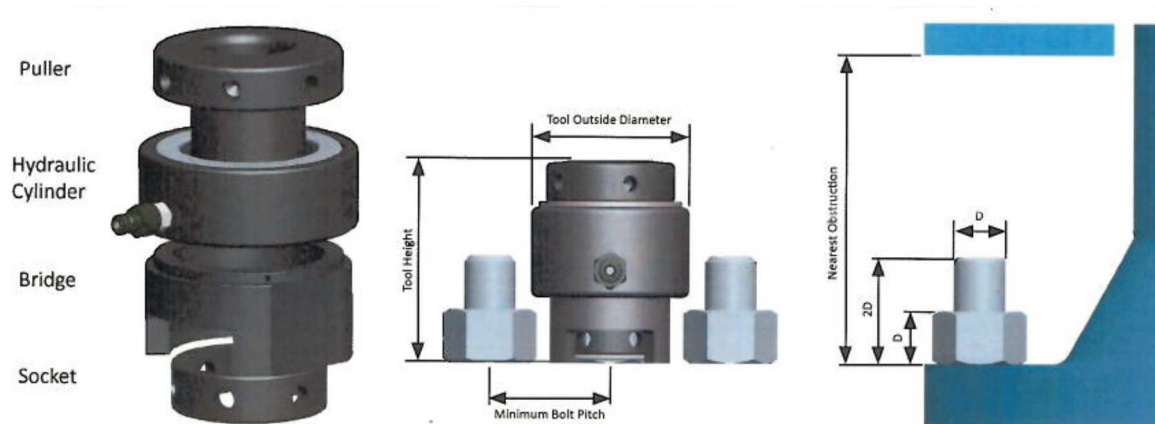

Metric sizes (inch sizes also available)

Tool No	Bolt Diameters	Stroke mm	Hydraulic Area mm ²	Max Load		Tool Outside Dia mm	Min Bolt Pitch mm	Nearest Obstruction mm	Tool Height mm
				kN	lbf				
21	M16	12	1,555	233	52,380	73	53	145	102
	M20						53		
	M22						53		
	M24						62		
	M27						62		
22	*M27*	15	2,884	433	97,342	105	62	175	131
	M30						73		
	M33						73		
	M36						81		
	M39						83		
23	*M39*	15	5,271	791	177,823	136	83	200	147
	M42						93		
	M45						96		
	M48						101		
	M52						104		
24	*M52*	15	8,445	1,267	284,832	172	104	230	168
	M56						123		
	M64						129		
25	*M64*	15	12,197	1,830	411,400	200	129	255	188
	M72						150		
	M76						154		
26	*M76*	15	16,682	2,502	562,471	235	154	288	212
	M80						176		
	M90						185		
27	*M90*	15	17,530	2,629	593,270	245	185	320	227
	M95						191		
	M100						197		



Die Dehnzylinder der DS-15 Serie verfügen alle über 2 Anschlüsse. Damit können mehrere Zylinder einfach gekoppelt werden.